

# HIGH-END-AUDIOPC.COM



## ControlPC

- OS: Windows Server 2012 R2 audiophile core edition
- Mainboard: Intel S1200KPR
- CPU: Intel XEON E3-1265Lv2 (45W)
- ECC RAM: 2x2GB Apacer ECC DDR3-1066, CL7, unbuffered  
Ext. Temperature, 75.A83EE.G000C (shielded)
- ATX PSU: Corsair AX760i
- LINEAR PSU: 2 x TeraDak U9VA (for OS & Music Disk)
- CF/SATA: PPA CF/SATA Adapter & Suspension Block
- OS Disk: 16GB Apacer CFC6 CompactFlash Card,  
Extended Temperature, AP-CF016GRAFS-ETNR
- Music Disk: 128GB SanDisk Extreme SSD & Suspension Block
- SATA Cable: 2 x Red PPA SATA Cable (TZ YUN Red)
- USB Card: PPA USB3 Card (connection to ext. 4TB USB drive)
- IC shielding: SOTM eABS-100
- LAN: Black PPA LAN Cable (TZ YUN)
- JPLAY LAN: Red PPA LAN Cable (TZ YUN RED)
- Case: Cooler Master Midi-Tower




## AudioPC

- OS: Windows Server 2012 R2 audiophile core edition
- Mainboard: Intel S1200KPR (shielded)
- CPU: Intel XEON E3-1265Lv2 (45W)
- ECC RAM: 2x2GB Apacer ECC DDR3-1066, CL7, unbuffered  
Ext. Temperature, 75.A83EE.G000C (shielded)
- PSU: PPA 160W DC to ATX PSU (wide range)
- BATTERY PSU: Red Wine Audio - Black Lightning (LFP Edition)  
2-Cell, 22V, Model-Nr: S10-2-25.6-5-22V
- OS Disk: 32GB PPA MLC SSD
- BATTERY PSU: 2 x Bakoon BPS-02 (for OS Disk & USB Card)
- SATA Cable: Red PPA SATA Cable (TZ YUN Red)
- USB Card: PPA USB3 Card (shielded, connection to DDC)
- IC shielding: SOTM eABS-100
- Case shielding: 3M AB5100S
- Case: Streamcom F7C Evo

PPA TZ YUN LAN Cable



PPA 160W PSU (wide range)

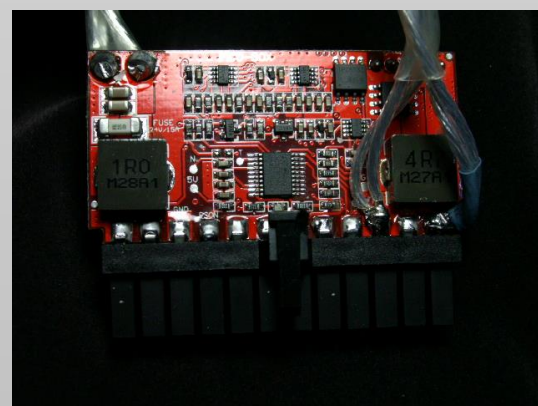

PPA CF/SATA Adapter



PPA MLC SSD




PPA RED SATA Cables





PPA USB3 Card

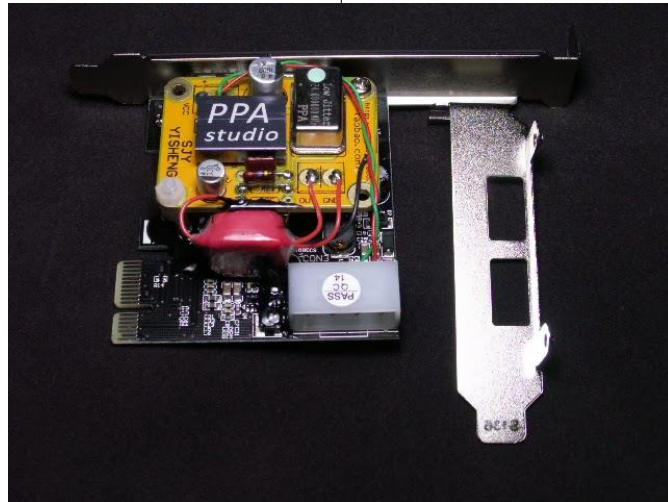

PPA TZ YUN Red USB Cable



S0tM dX-USB HD\* & mBPS-d2s



VOVOX vocalis IC digital AES/EBU



\*S0tM S-CLK 2224 SuperClock



MYTEK STEREO192-DSD DAC\*



\*HiFi-Tuning Supreme 3 Fuse's



Tubes: Siemens CCa / Tung-Sol 7236 / Telefunken EZ80



WooAudio WA2 Headphone TubeAmp\*

VOVOX textura IC direct RCA Cables



Beyerdynamic T1



# WooAudio WA2

